

**ONE TOUCH FITTINGS  
 FEMALE ELBOW**

Automation  
 Simplified...



- Solenoid Valve
- Angle Seat Valve
- Rotary Coupling
- Pneumatic Directional Control Valve
- Actuator
- Cylinder
- One Touch Fitting
- Ball Valve
- Butterfly Valve

Country of Origin - INDIA



**Specifications**

Type	Supply control	Exhaust control
Model	VF52	VF55
Free flow	2 → 1	1 → 2
Controlled flow	1 → 2	2 → 1
Media	Compressed air - Dry / Lubricated	
Operating pressure range	1 - 10 bar	
Ambient Temperature	+5° to +60° C	
Materials of construction	Brass, Acetal, Nitrile	
Applicable tubes	Nylon, Polyurethane	

**Features**

- ☑ Directly mountable on cylinder / valve ports
- ☑ Can be rotated by 360°
- ☑ Fine regulation of air flow
- ☑ Nickel plated body
- ☑ Male threads(R) teflon coated
- ☑ Elegant design and finish

**Application**

- ☑ These valves are used to control the speed of piston in a pneumatic cylinder.


**Function**

- ☑ These valves allow controlled flow of air in one direction and free flow in the other direction.
- ☑ These are available in two versions - a) Supply control version, and b) Exhaust control version.

**FEMALE ELBOW**



**Dimension Drawing** (All dimensions in mm)

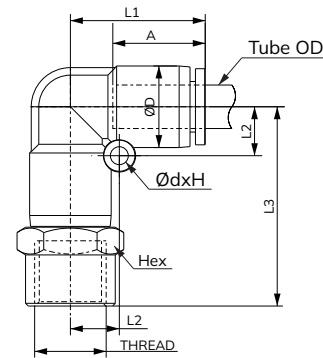

**Technical Data**

Model No.	Tube OD	Thread	HEX	ØD	L1	L2	L3	A	ØdXH
VO3506FV0	6	G1/8	14	13	20	8	28	15	3.3x11
VO3506GV0		G1/4	17	13	20	8	33	15	3.3x11
VO3508GV0	8	G1/4	17	15	25	9	37	17	3.3x15.5
VO3514JV0	14	G1/2	27	23	29	13	46	21	4.3 x23.5



# Global Presence...




Made In India



## CONTACT US:

 [sales@uflowvalve.com](mailto:sales@uflowvalve.com)  +91 851 109 8822  [www.uflowvalve.com](http://www.uflowvalve.com)

 Uflow Automation, Ankur Industrial Complex, Sur vey No: 275/276, Plot No: 31, Nr. Intol Cast Pvt. Ltd. Shapar( Veraval) Dist.: Gujarat (India) - 360 024.